


Divani

Laminate Wood
Carpet Tile
Vinyl Tile

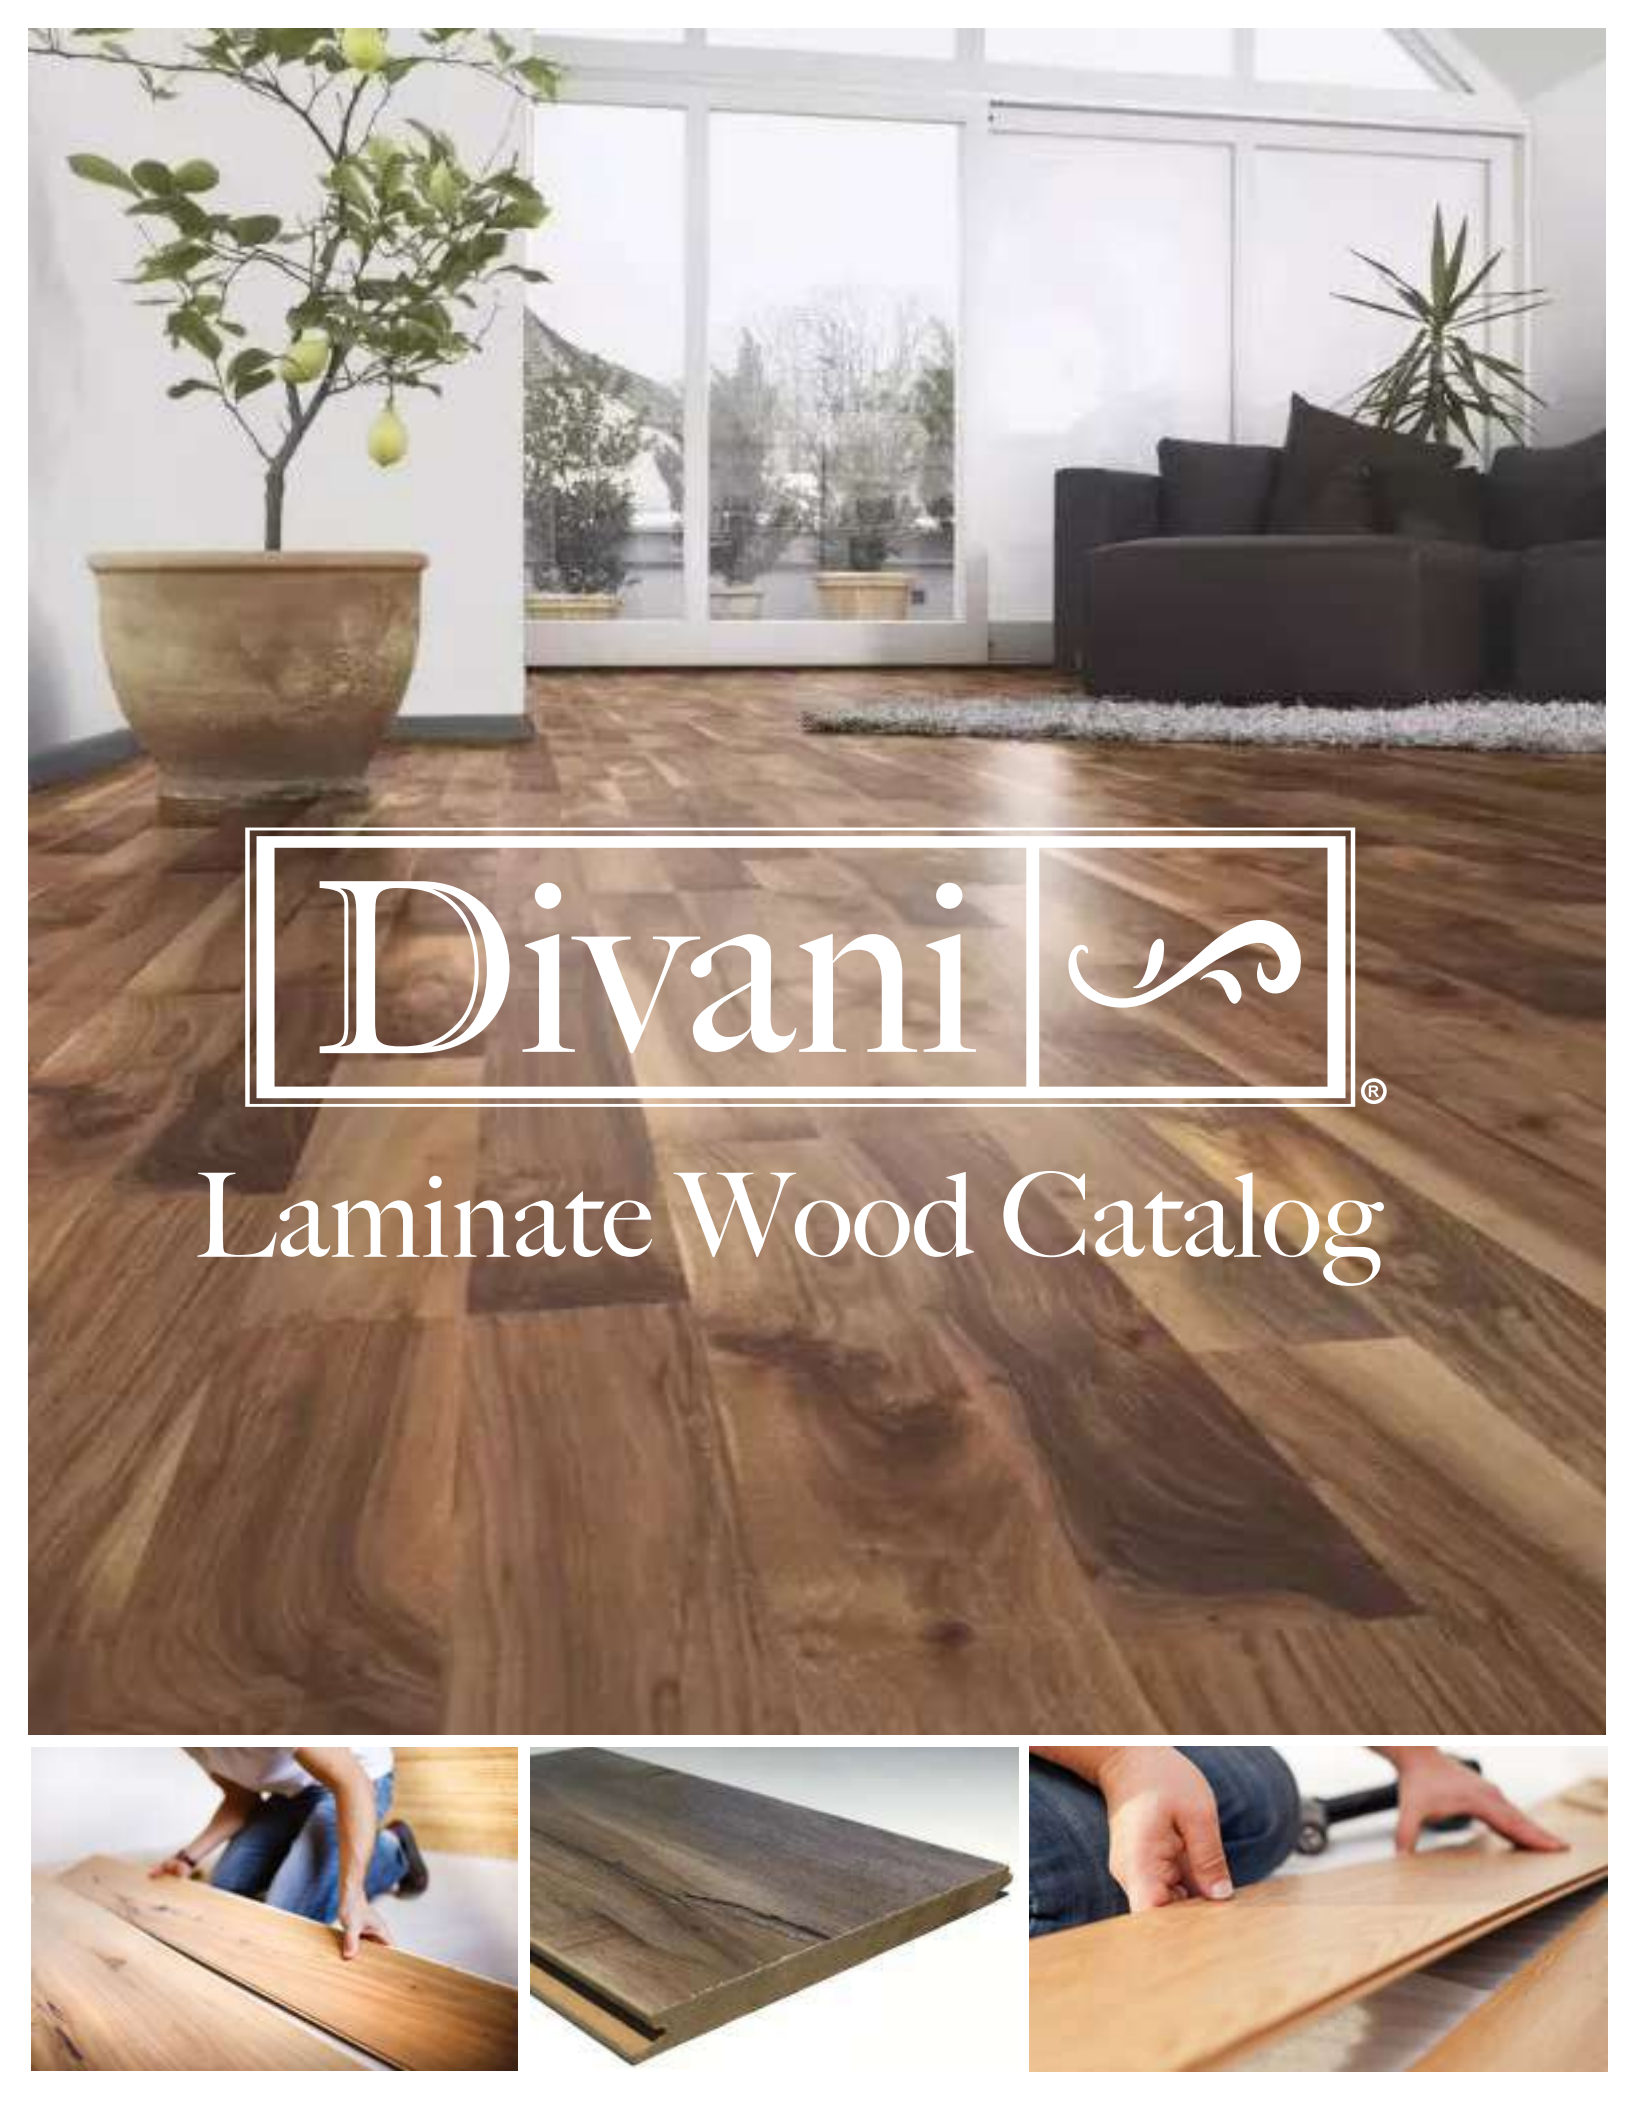

A large, bright living room with a wide floor-to-ceiling window. On the left, a potted lemon tree with green leaves and yellow fruit sits in a large, light-colored ceramic pot. To the right, a dark-colored sectional sofa is positioned against the wall. The floor is covered in a laminate wood product with a dark, natural wood grain pattern. The text "Divani" is overlaid in a white serif font, followed by a decorative flourish and a registered trademark symbol.

Divani®

Laminate Wood Catalog



Divani Laminate Wood

8mm HDF Laminate 121.5cm x 19.6cm

8 Pieces / Box

1.895m² / Box

14.40Kg / Box



Available Colors



KN 3501 "NATURAL WOOD"




KN 3508 "GREIGE WOOD"



99165-9 "HICKORY"



99165-5 "BEACHWOOD"



99191-7 "PECAN"



Laminate Wood

HDF MOULDINGS & UNDERLAYMENT for LAMINATE 8mm
Available in all 3 Laminate Colors



SKIRTING 80
240cm*8cm*1.5cm



STAIR BOARD MOULDING
240cm*11.5cm*2.4cm



T MOULDING
240cm*4.5cm*1.1cm




OYE3-A
3mm SILVER FOAM
Moisture Barrier and Backing
18.6m²/ Roll





Carpet Tile Catalog

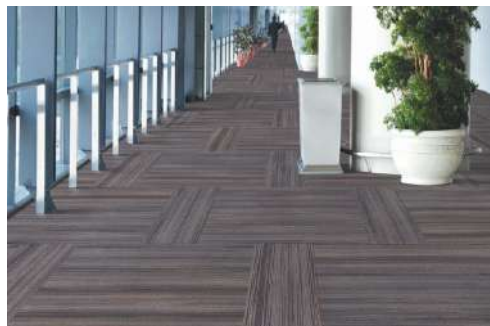

Carpet Tile Alfombra Modular


Invincible 851 Nylon Carpet Tile




851 020
Sahara




851 002
Cocoa



851 007
Alloy



851 012
Rockface



851 022
Volcanic



851 006
Calypso Blue

Fiber System

Solution Dyed Nylon

Pile Weight

18 oz/SY 610 g/m²

Gauge

1/12th 2.1 mm

Density

5500

Size & Packaging

Tile Size
19.7" x 19.7" (50 cm x 50 cm)

Carton
20 tiles per carton = 6 SY = 5 m²
32 cartons per pallet

Sustainability

- CRI Green Label Plus
- 100% PVC-Free
- Up to 20% pre-consumer recycled content

European Spec Backing

PVC-Free, Four-Layers:

1. Non-Woven Primary Layer
- Strong Edges
2. Advanced Polymer Pre-Coat
- Superior Tuft Lock
3. Modified Bitumen Core
- Stability in Heavy Traffic
4. Polyester Felt Back
- Reliable Adhesion


Testing

Flammability Class I (ASTM E648)
Static <2 kV (AATCC 134)

Warranties

Lifetime Stain Resistance
Lifetime Backing Performance
Lifetime Commercial Wear

Installation Methods



Quarter-Turn

Brick

Sample SKUS

Handle Boards
HB851NF
10 per carton (77 lbs)

Folders
2P851NF
20 per carton (45 lbs)

Producto Sobre Pedido excepto *



Carpet Tile Alfombra Modular


Intuition 845 Poly Carpet Tile




845 001
Desert Castle



845 010
Sienna



845 008
Cultivated Earth



845 007
Alloy



845 009
Fired Steel



845 013
Night Mission

Fibre System
Nextron Solution Dyed
Twisted Polypropylene

Pile Weight
18 oz/SY 610 g/m²

Gauge
1/12th 2.1 mm

Density
5500


Format
Tile Size: 19.7" x 19.7" 50 cm x 50 cm
Carton: 20 tiles = 6 SY = 5 m²
Pallet: 32 cartons

- PVC-Free Backing
1. Non-Woven Primary Layer
- Strong Edges
 2. Advanced Polymer Pre-Coat
- Superior Tuft Lock
 3. Modified Bitumen Core
- Stability in Heavy Traffic
 4. Polyester Felt Back
- Reliable Adhesion


Testing
Flammability Class I (ASTM E648)
Air Quality Certified Green Label Plus

- Lifetime Commercial Warranties
- Comprehensive Stain (No Exclusions)
 - Backing Performance
 - Commercial Wear

Installation Methods



Quarter-Turn



Brick

Sample SKUS
Handle Boards
HB845MX
10 boards per carton

Folders
2P845MX
20 folders per carton

Producto Sobre Pedido



Carpet Tile Alfombra Modular

Framework 879 Poly Carpet Tile



879 011
Sand Dune




879 012
Chestnut



879 008
Aluminium



879 013
Battleship



879 014
Graphite



879 002
Steel Blue

Fibre System
100% BCF Solution Dyed Polypropylene

Gauge
1/12th 2.1 mm

Density
5000

Format
Tile Size: 19.7" x 19.7" 50 cm x 50 cm
Carton: 20 tiles = 6 SY = 5 m²
Pallet: 32 cartons

- PVC-Free Backing**
1. Non-Woven Primary Layer
- Strong Edges
 2. Advanced Polymer Pre-Coat
- Superior Tuft Lock
 3. Modified Bitumen Core
- Stability in Heavy Traffic
 4. Polyester Felt Back
- Reliable Adhesion

Testing

Flammability	Class I (ASTM E648)
Static	<2 kV (AATCC 134)
Air Quality Certified	Green Label Plus

- Lifetime Commercial Warranties**
- Comprehensive Stain (No Exclusions)
 - Backing Performance
 - Commercial Wear

Installation Methods



Quarter-Turn

Sample SKUS
Handle Boards
HB879MX
10 boards per carton

Folders
2P879MX
20 folders per carton

Producto Sobre Pedido





Divani

Vinyl Tile Catalog



Vinyl Tile

Piso Vinilico

Coastal Resort 439 Heavy Commercial Traffic



439 051
Mineral White Maple

439 026
Dovetail Gray

439 005
Aged Driftwood

439 002
Light Twine

439 043
Salted Caramel

439 011
Shaded Walnut

Size

7.25" x 48" x 2.5 mm

Wear Layer

20 mil / UV-Cured Urethane

Embossing

Real Touch™ Embossed in Register

Edge Treatment

Beveled

Installation

Full Spread Adhesive

Packaging

17 pieces per carton (40 lbs)

41.1 SF per carton

55 cartons per pallet

20 pallets per container

Testing

Critical Radiant Flux

Surface Flammability

Coefficient of Friction

Static Load Limit

Sound Transmission Class (STC)

Impact Isolation Class (IIC)

High Frequency Impact Isolation Class (HIIC) ASTM E322

Floor Score Certified

Phthalate Free

100% Virgin PVC

Product Classification

ASTM F1700 Class III, Type B

Warranties

Lifetime Waterproof

Lifetime Residential Wear

25-Year Commercial Wear



ASTM E648	Class I
DOC FF 1-70	Passed
ASTM 2047	Passes > 0.6
ASTM F970	1300 lbs
ASTM E492	64
ASTM E989	69
ASTM E322	89

Sample SKUs

Handle Boards

HB439NF

*Includes Bandwidth Carpet
10 per carton (85 lbs)

Strap Sets

SS439NF

5 per carton (19 lbs)

Folders

3P439NF

*Includes Bandwidth Carpet
20 per carton (56 lbs)

Producto Sobre Pedido



Vinyl Tile

Piso Vinilico

Groundwork 423 & Bedrock 424 Commercial Traffic



Size

Plank	7.25" x 48"
	2 mm thick
Tile	12" x 24"
	2 mm thick

Wear Layer

12 mil / UV-Cured Urethane

Edge Treatment

Square Edge

Installation

Full Spread Adhesive

Product Classification

ASTM F1700 Class III, Type B

Packaging

Plank	21 pieces per carton (45 lbs)
	50.8 SF per carton
	55 cartons per pallet
	20 pallets per container
Tile	27 pieces per carton (45 lbs)
	54 SF per carton
	54 cartons per pallet
	20 pallets per container

Testing

Critical Radiant Flux
Surface Flammability
Coefficient of Friction
Static Load Limit
Floor Score Certified
Phthalate Free
100% Virgin PVC

ASTM E648
DOC FF 1-70
ASTM D2047
ASTM F970



Class 1
Passed
Passes > 0.6
1300 lbs

Sample SKUs

Handle Boards
HB424NF-B
10 per carton (80 lbs)

Strap Sets
SS424NF-B
5 per carton (20 lbs)

Folders
FP424NF-B
20 per carton (64 lbs)

Warranties

20-Year Waterproof
20-Year Residential Wear
10-Year Commercial Wear

Producto Sobre Pedido



Vinyl Tile

Piso Vinilico

Medalist 453 Commercial Traffic



453 563
Driftwood Oak

453 442
Daylight Oak

453 430
Linen Oak

453 443
Summer Truffle Oak

453 558
Arrowhead Oak

453 223
Tree Swing Oak

Size

7.25" x 48" nominal

Wear Layer

12 mil / UV-Cured Urethane

Installation

Full Spread Adhesive

Product Classification

ASTM F1700 Class III, Type B

Packaging

28 pieces per carton (39 lbs)
67.7 SF per carton
55 cartons per pallet
20 pallets per 20ft container

Testing

Critical Radiant Flux
Surface Flammability
Coefficient of Friction
Static Load Limit
Floor Score Certified
Phthalate Free
100% Virgin PVC

ASTM E648
DOC FF 1-70
ASTM 2047
ASTM F970



Class I
Passed
Passed >0.6
1300 lbs

Sample SKUs

Handle Board

HB453NF
5 per carton (71 lbs)

Strap Sets

SS453NF
5 per carton (55 lbs)

Folder

2P453NF
20 per carton (110 lbs)

Warranties

20-Year Waterproof
20-Year Residential Wear
10-Year Commercial Wear

Producto Sobre Pedido



ADHESIVES

Adhesivos Especializados Alfombra y Pisos Vinilicos



HENRY 650R Releasable Pressure Sensitive Adhesive

*Adhesivo Sensible tipo "Post-It" para pegar
Alfombras y Pisos de Vinil Modulares y Flexibles.*

CUBETA 4 Gal.
Rinde 111m²

1 Galon
Rinde 27m²

Delivers a truly releasable bond in the upward peel direction, while at the same time providing heavy commercial traffic-rated bonding strength in the lateral shear direction

99% RH moisture resistant*

Ideal for frequently renovated commercial and residential spaces

— TECHNICAL DATA HENRY® 650 R

Use for:

When the specific guidelines for installation from the flooring manufacturer allow for a releasable adhesive use HENRY® 650 R to install the following types of flooring:

- Vinyl-backed carpet tile
- Vinyl cushion-backed carpet tile
- Fleece-backed carpet tile
- Bituminous-backed carpet tile
- Fiberglass encapsulated (cushion-backed) sheet vinyl
- Designated carpet cushions (cushion-to-substrate only)
- LVT (luxury vinyl tile & plank)
- Heterogeneous sheet vinyl

Short-nap roller 3/16" – 3/8":

300 sq. ft. per 1 gal. (1,200 sq. ft. per 4 gal. pail) – 27.8 sq. m per 3.78 L. (111.4 sq. m per 15.14 L pail)

U-notch 1/32" D x 1/16" W x 1/32" A:

300 sq. ft. / 1 gallon (1,200 sq. ft. per 4 gal. pail) – 27.8 sq. m / 3.78 L. (111.4 sq. m per 15.14 L pail)

Square-notch 1/16" D x 1/16" W x 1/16" A:

125 – 150 sq. ft. per 1 gal. (500 – 600 sq. ft. per 4 gal. pail) – 11.6 – 13.9 sq. m per 3.78 L (46.4 – 55.7 sq. m per 15.14 L pail)



GREENLINE
ENVIRONMENTAL TECHNOLOGY



HENRY 256 Installer Grade Dual Purpose Adhesive Carpet & LVT

Adhesivo para pegar Alfombras y Pisos de Vinil Flexibles

CUBETA 4 Gal.
Rinde 52m²

— INFORMATION HENRY® 256

HENRY® 256 is an installer grade dual purpose adhesive that is excellent for light to moderate traffic areas.

Key Features

- Aggressive early grab
- Short open time
- Ample working time
- Moisture and alkali resistant
- Antimicrobial product protection
- Easy to use, easy to trowel



GREENLINE
ENVIRONMENTAL TECHNOLOGY



Divani



®

Laminate Wood
Carpet Tile
Vinyl Tile

